LOOX LED 2022

RECESS MOUNTED LIGHT/SURFACE MOUNTED DOWNLIGHT, ROUND

0 100%



The small size with a drill hole of just Ø 26 mm (1 1/16") is protected from water spray as a recess mounted light with an IP44 degree of protection allowing for utmost flexibility. The LED 2022 can be used as a surface mounted downlight with IP20 using optional surface mount rings and wedges.

- IP44 = When recess mounted.
- IP = Ingress Protection.
- $\underline{44} =$ Protected against solid objects greater than 1 mm in diameter.
- IP44
- 4<u>4</u> = Water splashed against the enclosure from any direction for three minutes. The fixture is tilted at any angle up to 15° from it's normal position.


3000 K	4000 K	5000 K	90°
650 lx	650 lx	650 lx	250 mm (9 13/16")
163 lx	163 lx	163 lx	500 mm (19 11/16")
72 lx	72 lx	72 lx	750 mm (29 1/2")
40 lx	40 lx	40 lx	1000 mm (39 3/8")

Item No.	833.72.040	833.72.043	833.72.041	833.72.044	833.72.042	833.72.045		
Light Color (K)	3000 (warm white)		4000 (cool white)		5000 (cool white)			
Diameter	35 (1 3/8")							
Height	14 (9/16")							
Degree of protection	IP44 as recess mounted light; IP20 with surface mount ring							
Wattage (W)	1.5							
Number of LEDs	er of LEDs 3							
ght output (Im) 105								
Efficacy (Im/W)	70							
Color rendering index (CRI)	82		87		88			
Energy efficiency category	A+							
Weighted energy consumption (kWh/1.000 h)	1.65							
Material	Aluminum							
Finish	silver colored anodized	chrome-plated polished	silver colored anodized	chrome-plated polished	silver colored anodized	chrome-plated polished		
Supplied with	upplied with 2 m (78 3/4") lead							

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"





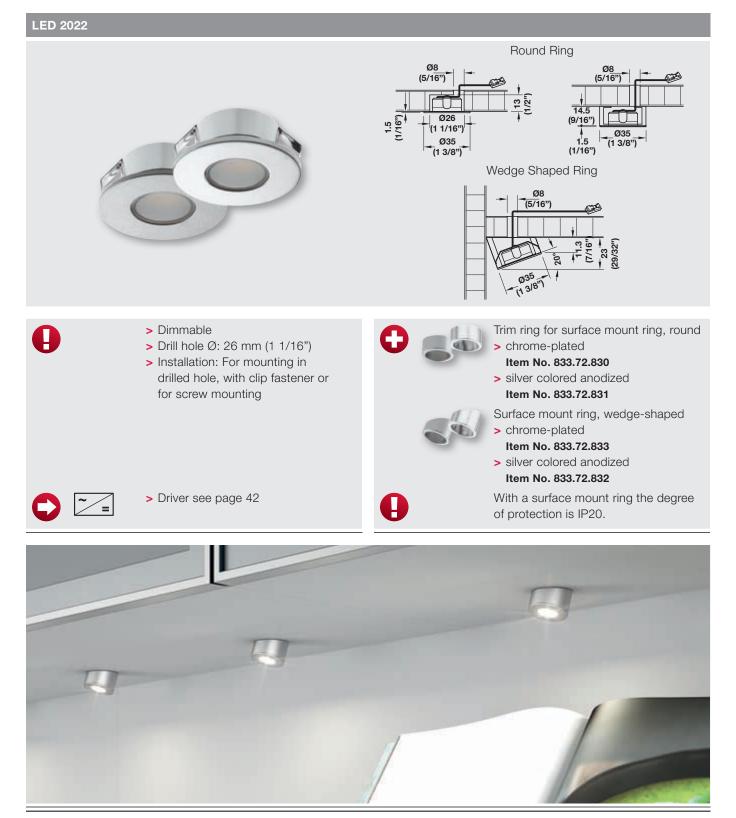

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"