

# LOOX LED 2023

## RECESS MOUNTED LIGHT, SQUARE



12 V SYSTEM



The universally adaptable LED 2023 provides several design options with its three color temperatures, compact size and two housing finishes.


With the IP44 degree of protection the recess mounted light is suitable for wet locations.

IP44 = When recess mounted.

IP = Ingress Protection.

44 = Protected against solid objects greater than 1 mm in diameter.


44 = Water splashed against the enclosure from any direction for three minutes. The fixture is tilted at any angle up to 15° from its normal position.

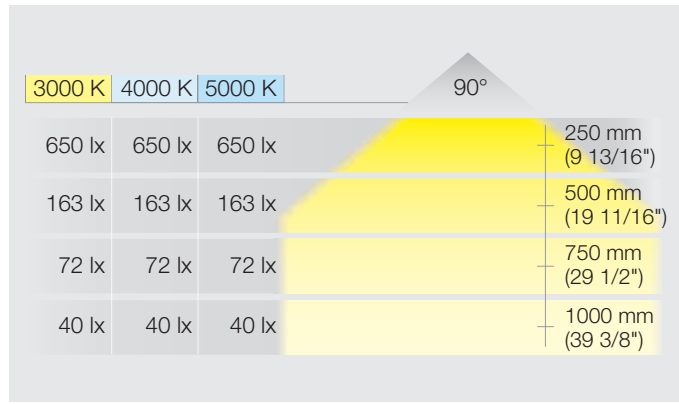

Item No.	833.72.060	833.72.064	833.72.061	833.72.065	833.72.062	833.72.066
Light Color (K)	3000 (warm white)		4000 (cool white)		5000 (cool white)	
Length	30 (1 3/16")					
Width	30 (1 3/16")					
Height	14 (9/16")					
Wattage (W)	1.5					
Number of LEDs	3					
Light output (lm)	105					
Efficacy (lm/W)	70					
Color rendering index (CRI)	82					
Energy efficiency category	A+					
Weighted energy consumption (kWh/1.000 h)	1.65					
Material	Aluminum					
Finish	chrome-plated polished	silver colored anodized	chrome-plated polished	silver colored anodized	chrome-plated polished	silver colored anodized
Supplied with	2 m (78 3/4") lead					

**Note** Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

LED 2023

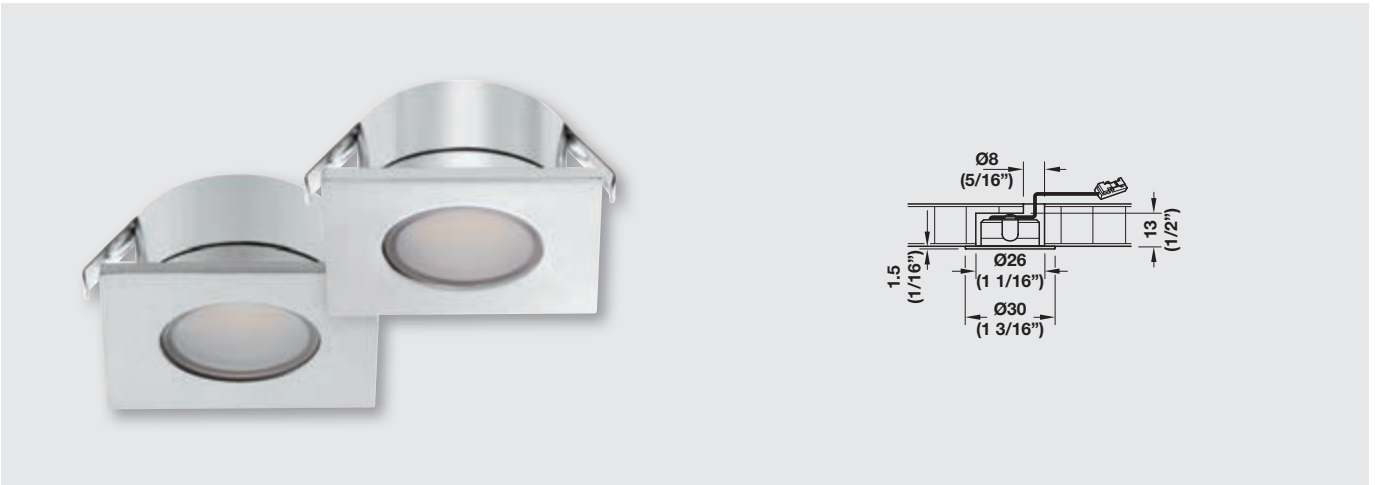

- ! > Dimmable
- > Drill hole Ø: 26 mm (1 1/16")
- > Installation: For mounting in drilled hole, with clip fastener

- ➔  > Driver see page 42



**Note** Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"