


LOOX LED 2029

SURFACE MOUNT LED STRIP LIGHTS WITH INLINE DIMMER SWITCH



12 V SYSTEM

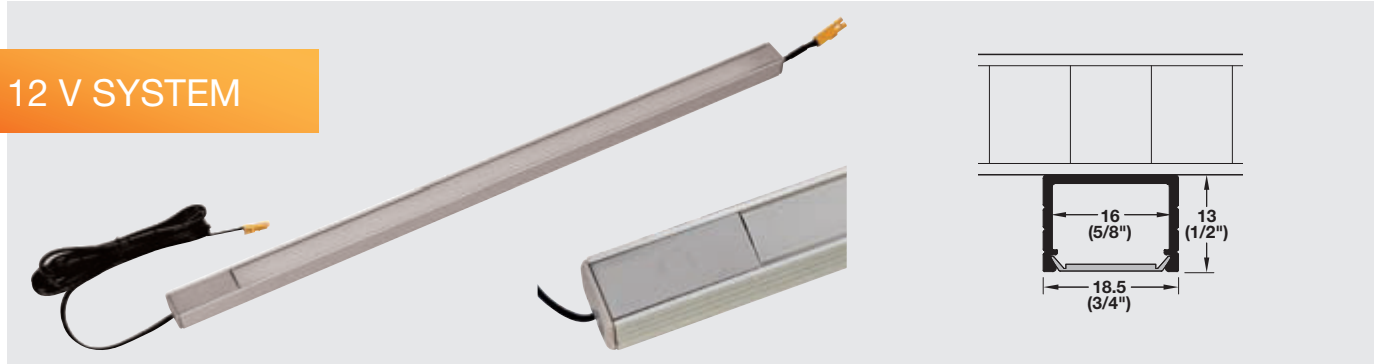

- > Supplied ready to install
- > Includes surface mount extrusion with milk lens, end caps, Loox 2029 ribbon, Inline touch on/off dimmer switch, and mounting brackets.
- > Optimal lengths for installing under your wall cabinets to brighten up your countertop workspace
- > Linkable to other light bars, see page 20



> Driver see page 42


3000 K	4000 K	120°	
2090 lx	2215 lx		250 mm (9 13/16")
522 lx	554 lx		500 mm (19 11/16")
232 lx	246 lx		750 mm (29 1/2")
130 lx	138 lx		1000 mm (39 3/8")

Light Color	Length	Number of LEDs	Wattage	Lumen	Lumen per Watt	CRI	Item No.
3000 warm white	152 (6")	9	0.7	62	85	82	833.73.530
4000 cool white							833.73.550
3000 warm white	269 (9")	18	1.5	124	85	82	833.73.532
4000 cool white							833.73.552
3000 warm white	381 (15")	36	2.9	249	85	82	833.73.534
4000 cool white							833.73.554
3000 warm white	457 (18")	45	3.7	311	85	82	833.73.536
4000 cool white							833.73.556
3000 warm white	533 (21")	54	4.4	373	85	82	833.73.538
4000 cool white							833.73.558
3000 warm white	686 (27")	72	5.9	497	85	82	833.73.540
4000 cool white							833.73.562
3000 warm white	838 (33")	90	7.3	622	85	82	833.73.542
4000 cool white							833.73.564
3000 warm white	991 (39")	108	8.8	746	85	82	833.73.544
4000 cool white							833.73.566
3000 warm white	1143 (45")	126	10.2	870	85	82	833.73.546
4000 cool white							833.73.568
Supplied with	2 m (78 3/4") driver connection cable with integrated switch, daisy chain cable, mounting brackets, screws, two-sided mounting tape.						

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

LOOX LED 2029

SURFACE MOUNT LED STRIP LIGHTS WITH LINKABLE CABLES

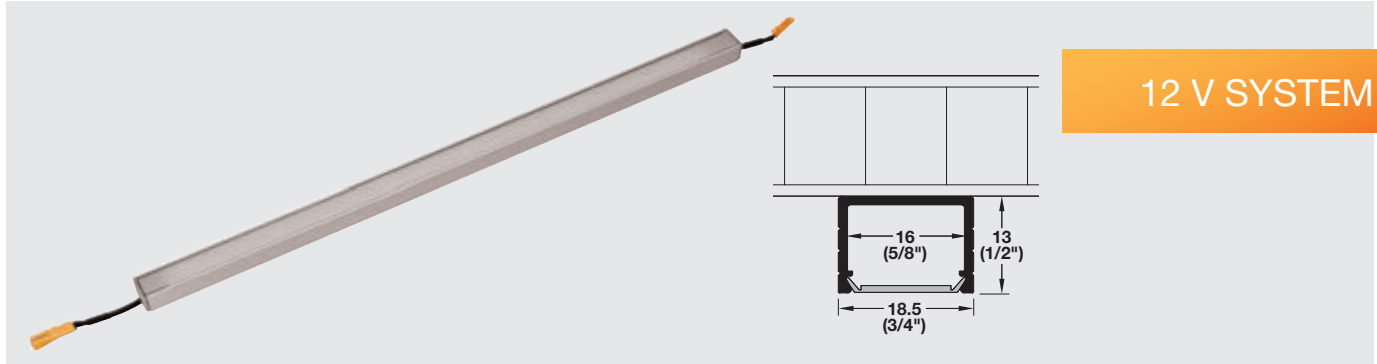

- > Supplied ready to install
- > Includes surface mount extrusion with milk lens, end caps, Loox 2029 ribbon, male and female daisy chain cables, and mounting brackets.
- > Optimal lengths for installing under your wall cabinets to brighten up your countertop workspace
- > Linkable to other light bars



> Driver see page 42

3000 K	4000 K	120°	
2090 lx	2215 lx		250 mm (9 13/16")
522 lx	554 lx		500 mm (19 11/16")
232 lx	246 lx		750 mm (29 1/2")
130 lx	138 lx		1000 mm (39 3/8")

Light Color	Length	Number of LEDs	Wattage	Lumen	Lumen per Watt	CRI	Item No.
3000 warm white 4000 cool white	152 (6")	12	1.0	83	85	82	833.73.531 833.73.551
3000 warm white 4000 cool white	269 (9")	21	1.7	145	85	82	833.73.533 833.73.553
3000 warm white 4000 cool white	381 (15")	39	3.2	269	85	82	833.73.535 833.73.555
3000 warm white 4000 cool white	457 (18")	48	3.9	332	85	82	833.73.537 833.73.557
3000 warm white 4000 cool white	533 (21")	57	4.6	394	85	82	833.73.539 833.73.559
3000 warm white 4000 cool white	686 (27")	75	6.1	518	85	82	833.73.541 833.73.563
3000 warm white 4000 cool white	838 (33")	93	7.6	642	85	82	833.73.543 833.73.565
3000 warm white 4000 cool white	991 (39")	111	9.0	767	85	82	833.73.545 833.73.567
3000 warm white 4000 cool white	1143 (45")	129	10.5	891	85	82	833.73.547 833.73.569
Supplied with	50 mm (2") daisy chain cables, mounting brackets, screws and two-sided mounting tape.						

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

