

LOOX LED 2040

RECESS MOUNTED LIGHT/SURFACE MOUNTED DOWNLIGHT, MODULAR



12 V SYSTEM



The LED 2040 completes the modular system (LED 2025 / LED 2026) providing a flexible solution for the Ø35 mm (1 3/8") drill hole.

The 3 color temperatures and different mountings provide various design options.




- > Dimmable
- > Drill hole Ø: 35 mm (1 3/8")
- > Installation: For mounting in drilled hole, with clip fastener or for screw mounting



> Driver see page 42

Item No.	833.72.140	833.72.141	833.72.142
Light Color (K)	3000 (warm white)	4000 (cool white)	5000 (cool white)
Diameter	38.5 (1 9/16")		
Height	15 (9/16")		
Wattage (W)	1.5		
Number of LEDs	3		
Light output (lm)	105		
Efficacy (lm/W)	70		
Color rendering index (CRI)	82	87	88
Energy efficiency category	A+		
Weighted energy consumption (kWh/1.000 h)	1.65		
Material	Aluminum		

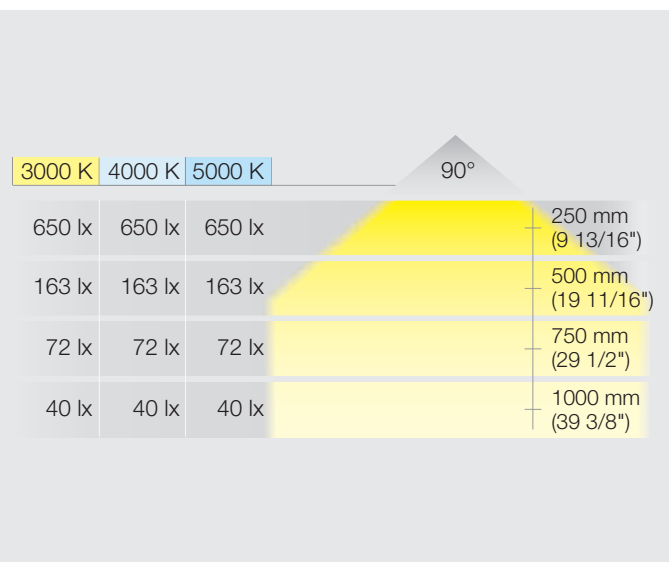


Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"


LED 2040



Surface Mounting

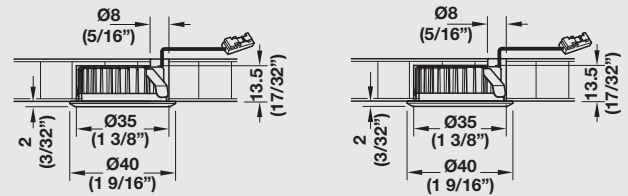


Recess Mounting

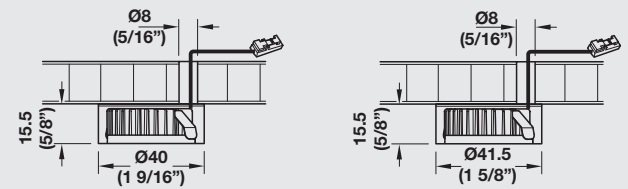

Trim ring for surface mounting, silver colored
 > Round **Item No. 833.72.143**
 > Square **Item No. 833.72.144**



Trim ring for recess mounting, silver colored
 > Round **Item No. 833.72.145**
 > Square **Item No. 833.72.146**



Lead
 > 500 mm (19 5/8'') **Item No. 833.72.128**
 > 1000 mm (39 3/8'') **Item No. 833.72.129**
 > 2000 mm (78 3/4'') **Item No. 833.72.123**



> **Note** Lights, trim rings and leads sold separately



Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"