



FlexTape 4.4W

12VDC FLEXIBLE LIGHTING



338 Lumens
per ft.
(1109 per meter)



Grab attention by adding our ultra-bright 4.4W LED tape to your next project. The thin and flexible design makes installation around corners, under shelves, and around cabinets effortless. Guaranteed to outshine and outlast other tapes, our 4.4W FlexTape is rigorously tested, ensuring quality, durability and consistent lighting.



- ▶ Easy-to-use connectors (No soldering!)
Tight reliable connections



- ▶ Sold by the roll (13' roll)



- ▶ Strong 300 LSE 3M™ adhesive backing

Features:



- ▶ Avg. rated life: 50,000 hours*
- ▶ White color tape maximizes light output
- ▶ Lower heat, longer life than competing brands
- ▶ Available in multiple color temperatures
- ▶ Dimmable
- ▶ Commercial grade - 3 year warranty

*When adhered to a metal substrate

Typical Applications:

- ▶ Store fixtures
- ▶ Edge lighting
- ▶ Back lighting
- ▶ Accent lighting
- ▶ Cove lighting
- ▶ Toe kick
- ▶ Soffit




▲ Scan for more info



Dimensions:


Actual Size

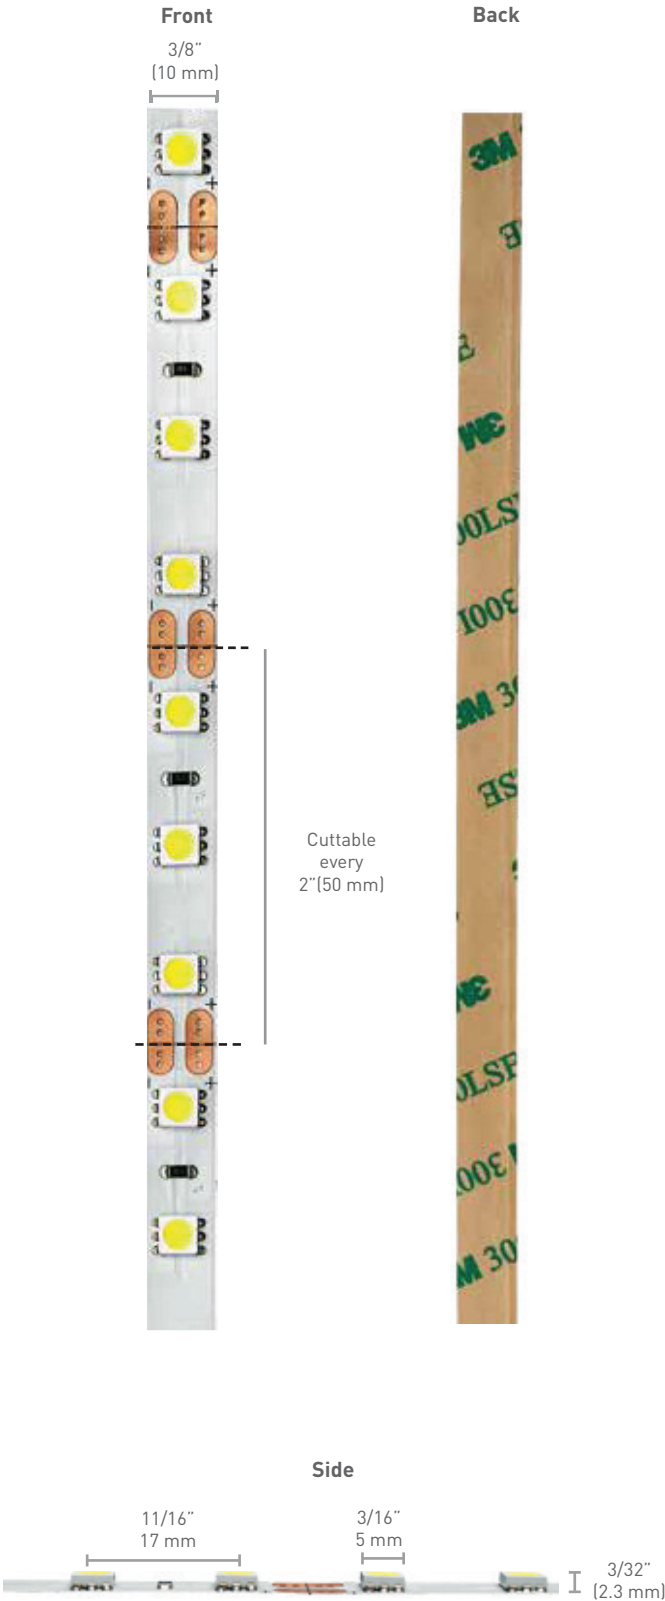

Specifications:

Wattage	4.4W/ft. (14.4 m/ft.)
Lumens	338 per ft. (1109 per m)
Efficacy (lm/W)	77
Input Voltage	12VDC
Lamp Life	50,000 Hours
Max Per 60W Power Supply	13' (3.96 m)
Max Continuous Run	13' (3.96 m)
Mounting	Surface
Warranty	3 Year
Certifications	


Beam Angle

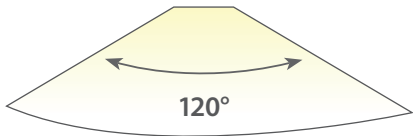

Photometric Data

	Height	Light Output	Beam Area
	1ft (.3 m)	119.70Fc (1288.4lx)	2.9ft L x 2.9ft W (.88 m L x .88 m W)
	3ft (.9 m)	13.30Fc (143.2lx)	8.7ft L x 8.8ft W (2.7 m L x 2.7 m W)
	6ft (1.8 m)	3.30Fc (35.5lx)	17.4ft L x 17.7ft W (5.3 m L x 5.4 m W)
L-FLXTPE-48CRV-1 Tested			


Color Temperature

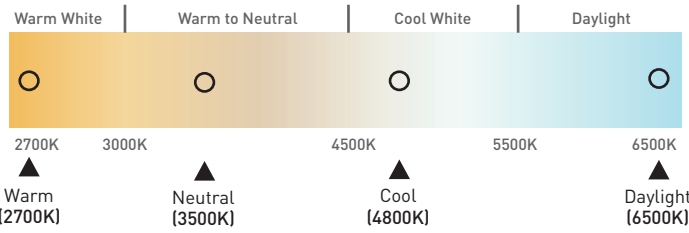

IES data verified by Intertek testing lab.

Required Items

FlexTape LED

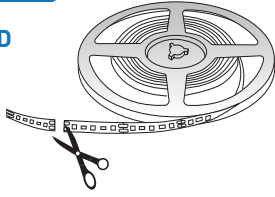

Part #	Description	Suggested List Price
L-FLXTPE-WRV-1	13' (4 m) 12VDC 2700K High Output FlexTape Roll	\$411.05
L-FLXTPE-NRV-1	13' (4 m) 12VDC 3500K High Output FlexTape Roll	\$411.05
L-FLXTPE-CRV-1	13' (4 m) 12VDC 4800K High Output FlexTape Roll	\$411.05
L-FLXTPE-DRV-1	13' (4 m) 12VDC 6500K High Output FlexTape Roll	\$411.05

Maximum continuous run is 13' (4 m). Maximum per power supply is 13' (4 m). Mounts with adhesive backing. Cuttable every 2" (50 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.


Power Supplies



For details see Power Supplies on page 377

FlexTape 4.4W works with all Tresco 12VDC power supplies.


Starter Cord

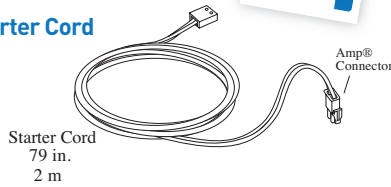

Part #	Description	Suggested List Price
L-LED-TPEPKT-2M-1	79" (2 m) FlexTape Straight Starter Lead	\$13.65
L-TPEPKT-2IN-1	2" (50 mm) FlexTape Straight Starter Lead	\$7.80


5/8" (16 mm) hole required.
Maximum linear run of FlexTape LED from one starter cord is 13' (4 m).

Tee Starter Cord

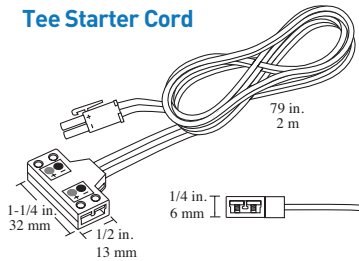


Part #	Description	Suggested List Price
L-LED-TPEPKT-2M-TEE-1	79" (2 m) FlexTape Tee Starter Lead	\$8.70

13' (4 m) maximum per starter, 13' (4 m) maximum continuous run.
5/8" (16 mm) hole required.

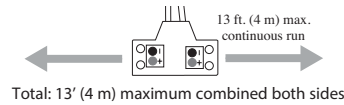


Optional Items

Back-to-Back Connector

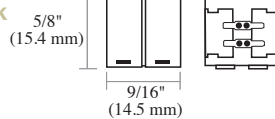

Part #	Description	Suggested List Price
L-TPELNK-BTB-1	Back-to-Back Connector	\$2.95


Tee Connector

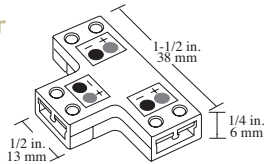


Part #	Description	Suggested List Price
L-LED-TPELNK-TEE-1	Tee Link Connector	\$5.65



Right Angle Connector

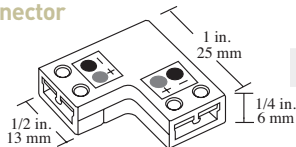

Part #	Description	Suggested List Price
L-LED-TPELNK-CON90-1	90° Link Connector	\$4.95



Jumper Cord



Part #	Description	Suggested List Price
L-LED-TPELNK-5-1	2" (5 cm) FlexTape Link Cord	\$5.10
L-LED-TPELNK-15-1	6" (15 cm) FlexTape Link Cord	\$5.65
L-LED-TPELNK-25-1	10" (25 cm) FlexTape Link Cord	\$6.25
L-LED-TPELNK-60-1	24" (60 cm) FlexTape Link Cord	\$7.10
L-LED-TPELNK-120-1	48" (120 cm) FlexTape Link Cord	\$7.40
L-LED-TPELNK-180-1	72" (180 cm) FlexTape Link Cord	\$8.10

Positive and negative contacts on FlexTape and FlexConnects should match-up to maintain proper polarity.