

LOOX LED 4016

RECESS MOUNTED DOWNLIGHT, MULTIFUNCTIONAL




- > Dimmable
 - > Surface-directed, even illumination
 - > IP44 after installation
 - > High-quality metal housing
 - > Drill hole: Ø58 mm (2 9/32")
- IP44
 IP = Ingress Protection.
 44 = Protected against solid objects greater than 1 mm in diameter.
 44 = Water splashed against the enclosure from any direction for three minutes. The fixture is tilted at any angle up to 15° from it's normal position.




> Driver see page 79

The multifunctional LED 4016 provides extremely even lighting in all areas.
 Two different light colors offer extensive design options.

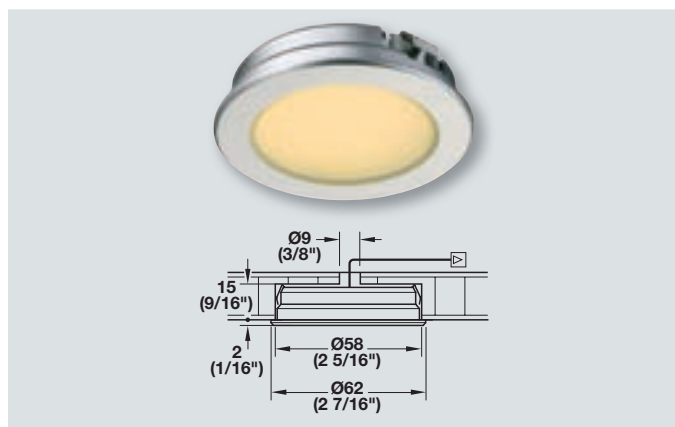

Item No.	833.78.070	833.78.071
SRP	\$60.00	\$60.00
Light color (K)	3000 (warm white)	4000 (cool white)
Diameter	62 (2 7/16")	
Height	15 (9/16")	
Wattage (W)	2	
Number of LEDs	LED Surface light	
Light output (Lm)	160	190
Efficacy (Lm/W)	80	95
Color rendering index (CRI)	80	82
Material/Finish	Aluminum, nickel-plated matt	
Supplied with	2 m (78 3/4") lead	

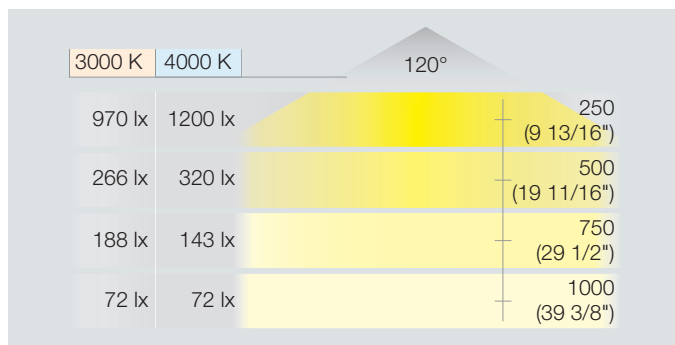

Note LoOX Lights and Drivers are "Suitable for use within Closet Storage Spaces"

