

# LOOX LED 2025/2026

RECESS MOUNTED LIGHT/SURFACE MOUNTED DOWNLIGHT, MODULAR



## 12 V SYSTEM




The modular principle with differently designed housings for recess or surface mounting and leads in different lengths, allow these lights to be used in a variety of applications.  
The drill hole 58 mm (2 1/4") is ideal for replacing halogen lights, while the powerful illumination is optimal for use in working areas.

LED 2025			LED 2026			80°	
3000 K	4000 K	5000 K	3000 K	4000 K	5000 K		
2236 lx	2257 lx	2290 lx	1861 lx	2034 lx	2052 lx	250 mm (9 13/16")	
759 lx	764 lx	773 lx	465 lx	512 lx	513 lx	500 mm (19 11/16")	
248 lx	250 lx	254 lx	206 lx	213 lx	228 lx	750 mm (29 1/2")	
139 lx	141 lx	143 lx	116 lx	125 lx	128 lx	1000 mm (39 3/8")	

Item No.	LED 2025			LED 2026		
	833.72.120	833.72.121	833.72.122	833.72.130	833.72.131	833.72.132
Light Color (K)	3000 (warm white)	4000 (cool white)	5000 (cool white)	3000 (warm white)	4000 (cool white)	5000 (cool white)
Diameter	61.2 ( 2 13/32")			61.2 ( 2 13/32")		
Height	15.6 (5/8")			15.6 (5/8")		
Wattage (W)	3.8			3.0		
Number of LEDs	1 (COB)			6		
Light output (lm)	280	302	316	251	292	293
Efficacy (lm/W)	74	79	83	84	97	98
Color rendering index (CRI)	82			83		
Energy efficiency category	A+			A+		
Weighted energy consumption (kWh/1.000 h)	4.18			3.30		
Material	Aluminum			Aluminum		

**Note** Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

## LED 2025/2026

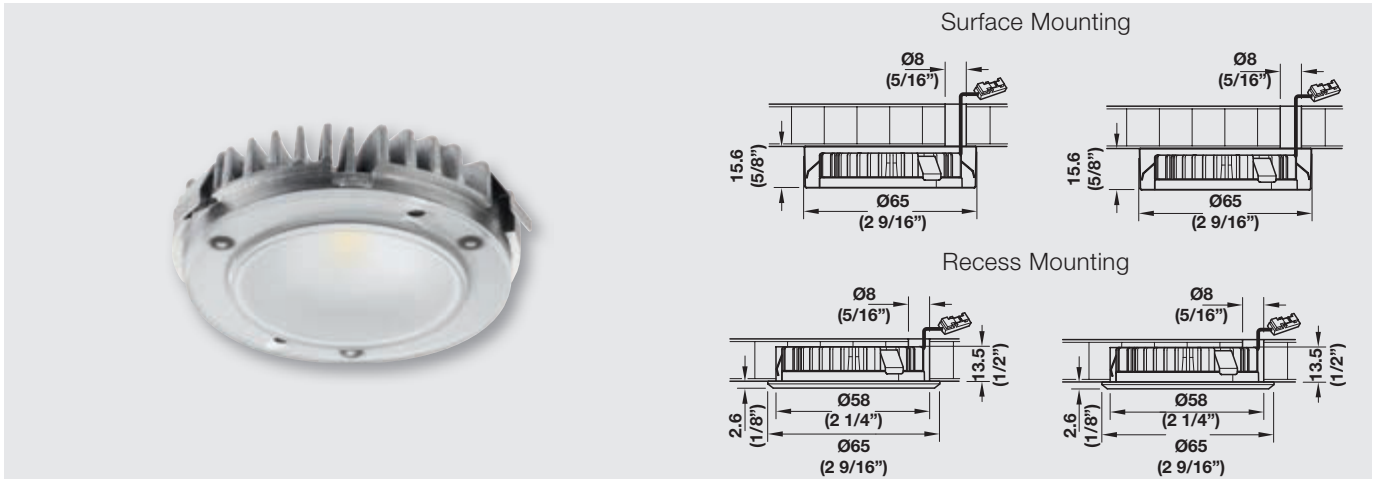

- > Dimmable
- > Drill hole Ø: 58 mm (2 1/4")
- > Installation: For mounting in drilled hole, with clip fastener or for screw mounting
- > LED 2025 is not dimmable with magnetic low voltage drivers
- > **Note** Lights, trim rings and leads sold separately



- > Driver see page 42




Trim ring for surface mounting, silver colored

- > Round **Item No. 833.72.124**
- > Square **Item No. 833.72.125**



Trim ring for recess mounting, silver colored

- > Round **Item No. 833.72.126**
- > Square **Item No. 833.72.127**



Lead

- > 500 mm (19 5/8") **Item No. 833.72.128**
- > 1000 mm (39 3/8") **Item No. 833.72.129**
- > 2000 mm (78 3/4") **Item No. 833.72.123**



**Note** Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"