LOOX LED 2030 LED SILICONE STRIP LIGHT, 5 M, 300 LEDS

0 100%



Creates efficient, flexible and functional background lighting for furniture and furnishings. The silicone encapsulation allows this strip light to be used without an aluminum profile. The light can be shortened every 50 mm (2") and is ideal for retrofitting. The cut silicone strip can be re-used with the appropriate clip and corner connectors.

A

- > Dimmable
- > The cut silicone strip can be re-used
- Consider the width of clip connector (see drawing) when choosing an aluminum profile
- > Installation: Self-adhesive
- > Max. 6 m (20') per lead



> Driver see page 42

Item No.	833.73.480	833.73.481	833.73.482	833.73.520			
Light Color (K)	2700 (warm white)	3000 (warm white)	4000 (cool white)	5000 (cool white)			
L x W x H	5000 x 8 x 2.3 (196 7/8" x 5/16" x 1/16")						
Wattage (W)	24 (4.80 per meter) [1.46 per foot]						
Number of LEDs	300 (60 per meter)						
Light output (Im)	1930	1940	1950	1980			
Efficacy (Im/W)	80	81	81	83			
Color rendering index (CRI)	82						
Energy efficiency category	A+						
Weighted energy consumption (kWh/1.000 h)	5.28 per meter						
Material/Finish	LED board, white						
Supplied with	2 m (78 3/4") lead						

2700 K	3000 K	4000 K	5000 K	120°		
883 lx	888 lx	892 lx	903 Ix		250 mm (9 13/16")	
220 lx	222 lx	223 lx	226 lx		500 mm (19 11/16")	
98 lx	99 lx	99 lx	100 lx		750 mm (29 1/2")	
55 lx	56 lx	56 lx	56 lx		1000 mm (39 3/8")	
					. (22.5/07)	
• Note The velues above service to a strip light						
Note The values above apply to a strip light length of 1 m (39 3/8")						


 The specified color temperature is the color temperature of the LED. The silicone covering increases the color temperature of the strip light.

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

29 / Loox 12 V / Dimensions in mm. Inches are approximate.

🕃 🛞 🕕 RoHS 🔂 (е IP20



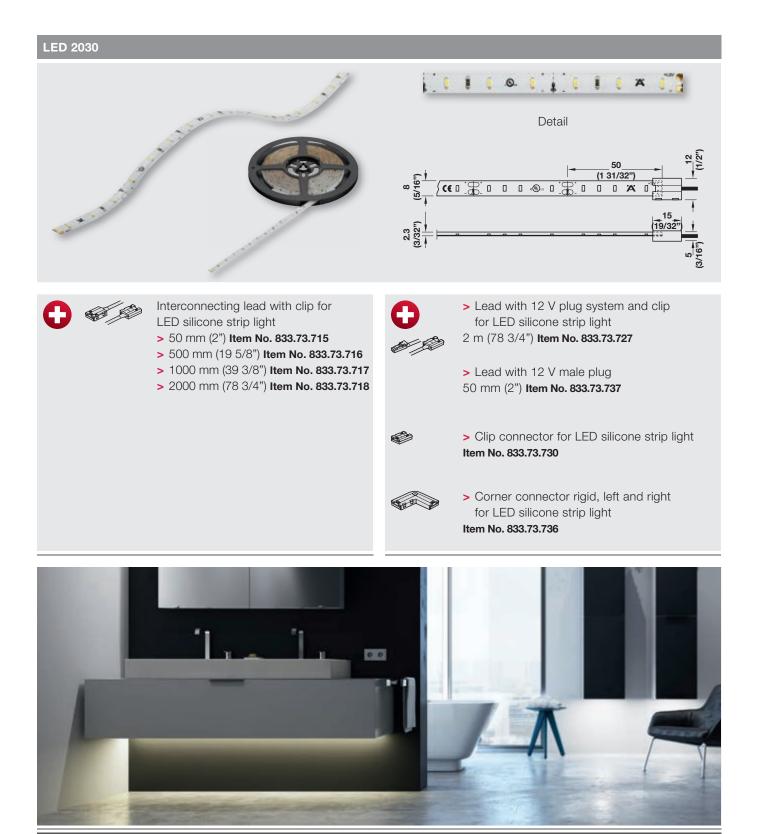

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"